DetNet   H. Wang
Internet Draft   P. Wang
Intended status: Standards Track   H. Yang
Expires: November 15, 2018   Chongqing University of
                                              Posts and Telecommunications
                                                         May 14, 2018

       Joint Deterministic Scheduling Requirements for Industrial
                         Field/Backhaul Networks
               draft-wang-detnet-backhaul-requirements-03

Abstract

   This document analyzes the requirements of joint deterministic
   scheduling in industrial field/backhaul networks. The requirements
   include six aspects: determinacy, time synchronization,
   compatibility, scalability, scheduling cost and unified management.

Status of this Memo

   This Internet-Draft is submitted in full conformance with the
   provisions of BCP 78 and BCP 79.

   Internet-Drafts are working documents of the Internet Engineering
   Task Force (IETF), its areas, and its working groups. Note that
   other groups may also distribute working documents as Internet-
   Drafts.

   Internet-Drafts are draft documents valid for a maximum of six
   months and may be updated, replaced, or obsoleted by other documents
   at any time. It is inappropriate to use Internet-Drafts as reference
   material or to cite them other than as "work in progress."

   The list of current Internet-Drafts can be accessed at
   http://www.ietf.org/ietf/1id-abstracts.txt

   The list of Internet-Draft Shadow Directories can be accessed at
   http://www.ietf.org/shadow.html

   This Internet-Draft will expire on November 15, 2018.

Table of Contents

1. Introduction

   Industrial network includes many types of industrial field networks,
   such as the three industrial wireless network standards:
   ISA100.11a[IEC62734], WirelessHART[IEC62591] and WIA-PA[IEC62601].
   Most industrial field networks are in a middle or small size, and
   the network coverage is constant, for example, a field network
   usually covers a production area of a plant. Therefore, there is a
   need for industrial backhaul network that makes data flow from an
   industrial field network to other field networks, or transmits data
   access to Manufacturing Execution System (MES) or Enterprise
   Resource Planning (ERP). Thus, a new network architecture, the
   deterministic industrial field/backhaul network, is proposed in this
   draft. Some questions of deterministic have been described in the
   draft [I-D.finn-detnet-problem-statement], and the architecture and
   application have been illustrated in [I-D.finn-detnet-architecture]
   and [I-D.bas-usecase-detnet] separately.

The proposed network architecture is mainly applied to industrial production environment, which has strong demands on packet loss ratio of network data, low jitter and determinacy and so on. The backhaul network is a heterogeneous network including field wireless networks and wired networks. Industrial backhaul network contains a centralized controller, thus it can schedule the network resources of bandwidth and cache. However, some industrial field networks such as ISA100.11a, WirelessHART, have their own system manager and management mode. At the same time, there is no system manager for some types of networks. Thus, it is an issue remained to study about how to implement a joint scheduling under a complex industrial networks environment.

2. Network Structure

Figure 1 shows a typical deterministic industrial field/backhaul networks structure. The field network is ISA100.11a, which is a standard of international industrial wireless network. ISA100.11a employs Time Division Multiple Access (TDMA) mechanism to realize the network time-slot, and provide a deterministic guarantee for sensor data. Data derived from the field networks is access to industrial backhaul networks. In the last, sensor data either transmits to another industrial field networks, or to the internet applications or the enterprise information management system like MES/ERP.

```
+-----------------------+
|    ISA100.11a field   |
|   wireless network    | -----------+
+-----------------------+            |
                                     |
                        +-------------------+    +-----------+
                        | Industrial backhaul |    |Internet or|
                        |      network      | ---|  MES/ERP  |
                        +-------------------+    +-----------+
+-----------------------+            |
|    ISA100.11a field   | -----------+
|   wireless network    |
+-----------------------+
```
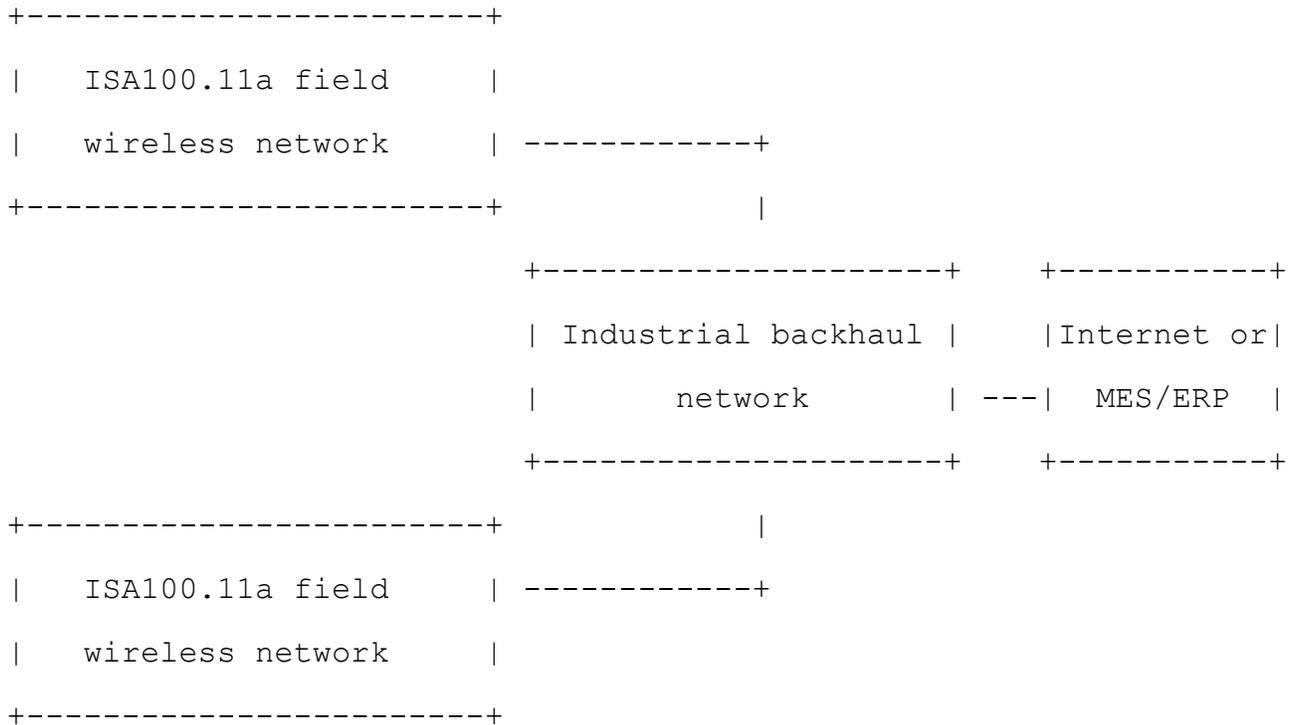
Figure 1. Typical network structure

Thus, in the above network structure, field network nodes deployed in a plant can communicate with the field network nodes deployed in another plant through the industrial backhaul network. Meanwhile, the internet or information management system can manage the sensor nodes of the field network remotely through the industrial backhaul network.

3. Joint Scheduling Requirements

3.1. Determinacy

The data, which generates from industrial field network, is directly used to monitor industrial production process, so the requirement of data deterministic transmission is very significant, and data needs to arrive at its destination in a certain time. Industrial field/backhaul network is a joint network consisting of multiple industrial field networks and backhaul networks, so it also requires to meet the demands of deterministic transmission of the industrial field network data in the joint scheduling.

3.2. Time Synchronization

Because the industrial field/backhaul network is a data aggregation network, and needs scheduling method to ensure deterministic transmission for data stream. Thus, industrial field/backhaul network requires high time synchronization accuracy among all network devices. The accuracy of time synchronization should be held from the range of 10ns to 10ms according to different network applications. Presently, the existing time synchronization protocols include IEEE 1588 and IEEE 802.1, which are raised by Time Sensitive Networking (TSN) Task Group.

3.3. Compatibility

Industrial field network and backhaul network both comprise different types of networks. Industrial field networks such as ISA100.11a, WirelessHART usually contains built-in system management, which can allocate network communication resources to data stream. But to achieve unified management of the industrial field network by the central controller. some mechanisms and interfaces are necessary when conducting joint scheduling to keep compatibility with industrial field/backhaul network.

3.4. Scalability

Generally, the field network data cannot be transmitted across network. While in the deterministic industrial field/backhaul network, the characteristic of cross-networks should be supported. Therefore, The scalability of the backhaul network should be supported to ensure that different types of industrial field network data can be transmitted in the backhaul network.

3.5. Scheduling Cost

The joint scheduling of industrial field/backhaul networks refers to different networks, when the network manager calculates the scheduling results, it should satisfy a low scheduling cost, such as low computation time, and otherwise it will bring extra delay to the transmission of data stream. Meanwhile, lower CPU load and memory footprint can make joint scheduling with better cross-platform compatibility.

3.6. Unified Management

Most industrial wireless networks have their own network manager. Network manager is able to configure the time slots and channels of field networks. Meanwhile, some backhaul networks also have their

independent management units and protocols. For hybrid industrial field/backhaul networks, all industrial field network data are transmitted through the backhaul network.Therefore, it is an important issue to realize the unified management of cross-network data stream in multiple heterogeneous networks by combining every separate network manager.

4. Security Considerations

5. IANA Considerations

This memo includes no request to IANA.

6. References

6.1. Normative References

6.2. Informative References

[IEC62734]
          ISA/IEC, "ISA100.11a, Wireless Systems for Automation, also IEC 62734", 2011, <http://www.isa100wci.org/enUS/ Documents/PDF/3405-ISA100-WirelessSystems-Future-brochWEB-ETSI.aspx>.

[IEC62591]
          www.hartcomm.org, "Industrial Communication Networks - Wireless Communication Network and Communication Profiles - WirelessHART - IEC 62591", 2010,< <https://webstore.iec.ch/p-preview/info iec62591%7Bed1.0%7Den.pdf>

[IEC62601]
          IEC, "Industrial networks - Wireless communication network and communication profiles - WIA-PA – IEC 62601", 2015, <https://webstore.iec.ch/preview/info iec62601%7Bed2.0%7Db .pdf>

[I-D.finn-detnet-problem-statement]
          Finn, N. and P. Thubert, "Deterministic Networking Problem Statement", draft-finn-detnet-problem-statement-05 (work in progress), March 2016.

[I-D.finn-detnet-architecture]
          Finn, N., Thubert, P., and M. Teener, "Deterministic Networking Architecture", draft-finn-detnet-architecture-08 (work in progress), August 2016.

[I-D.bas-usecase-detnet]
          Kaneko, Y., Toshiba and Das, S, "Building Automation Use
          Cases and Requirements for Deterministic Networking", draft-
          bas-usecase-detnet-00 (work in progress), October 2015.

[IEEE802.1AS-2011]
          IEEE, "Timing and Synchronizations (IEEE 802.1AS-2011)",
          2011, <http://standards.ieee.org/findstds/standard/802.1AS-
          2011.html>.

Authors' Addresses

   Heng Wang
   Chongqing University of Posts and Telecommunications
   2 Chongwen Road
   Chongqing, 400065
   China

   Phone: (86)-23-6248-7845
   Email: wangheng@cqupt.edu.cn

   Ping Wang
   Chongqing University of Posts and Telecommunications
   2 Chongwen Road
   Chongqing, 400065
   China

   Phone: (86)-23-6246-1061
   Email: wangping@cqupt.edu.cn

   Hang Yang
   Chongqing University of Posts and Telecommunications
   2 Chongwen Road
   Chongqing, 400065
   China

   Phone: (86)-23-6246-1061
   Email: 18716322620@163.com